

# Hep<sub>v</sub>O

## Sanitary waste valve

Hep<sub>v</sub>O is used instead of a P-Trap to protect the living space from foul odors from the grey water tank, black water tank or campground sewer system.

Each Hep<sub>v</sub>O is approved to protect one sanitary fixture, which can be a Lavatory, Shower, Bathtub, Single or Double sink, Washing Machine, Dishwasher or Bidet. A single Hep<sub>v</sub>O may only be used to protect multiple fixtures under strictly defined conditions.

Hep<sub>v</sub>O eliminates the need to have the fixture it is installed on individually vented (through the roof or anti-siphon venting).



**In-line design.**  
Easy to install in confined spaces.  
Ideal for sinks, showers, and other fixtures including dishwashers and washing machines.

## Features and Benefits:

- Polypropylene material – lightweight and durable
- Replaces commonly used Tubular and Schedule 40 p-traps, air admittance valve and cleanout
- Enables space saving e.g. two thru one solution used in shower and bathroom sink
- Self-sealing silicon membrane ensures that this can remain dry and odourless and doesn't retain/clog up excess waste
- Installation: horizontal and vertical
- Won't fail due to siphonage, freezing or evaporation unlike other P Traps



**wavin**

An Orbia business.

BV1B/UB - 1 1/2"

# Hep<sub>v</sub>O



## Waterless RV Trap

Stop foul odors  
from entering RVs.

Compact design  
means Hep<sub>v</sub>O is  
ideal for installation  
in confined areas.

Silent operation  
- no gurgling.

Eliminates need for  
water seal. Therefore  
no evaporation or  
siphonage of trap.

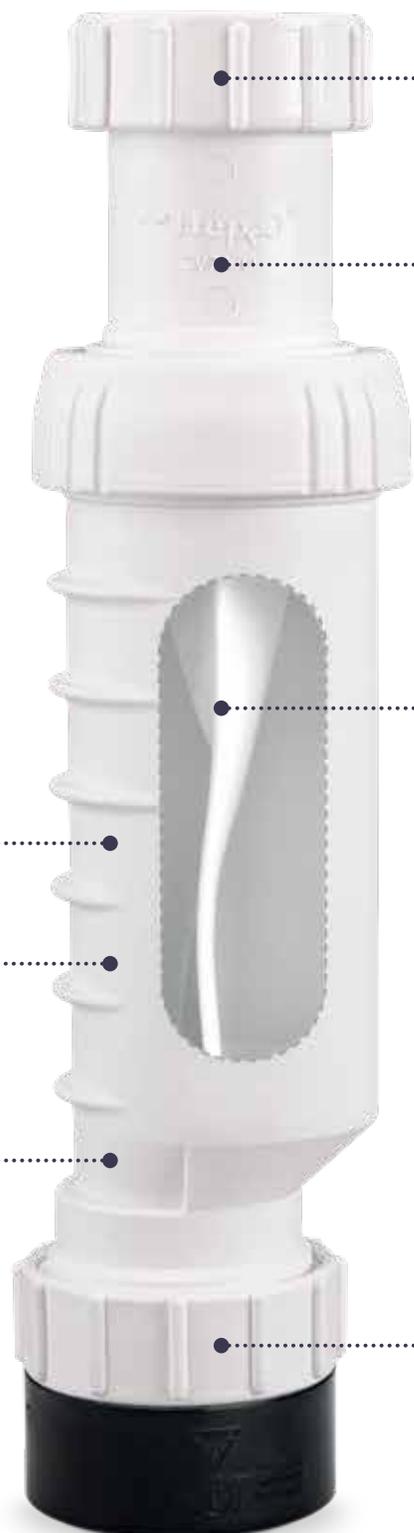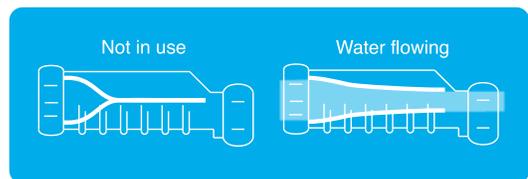

1 1/4" or 1 1/2" In Line or  
Angled Adaptor with  
slip joint connection.

1 1/2" Threaded Connection  
to Fixture or Adaptors  
Supplied With Kit.

Prevents the escape of  
foul sewer air from waste  
discharge systems.

Actively maintains  
a pressure equilibrium  
in soil and waste  
installations.

Prevents waste water  
back-up into appliance.

SBV/U Hep<sub>v</sub>O Outlet  
Various outlet options  
are available: Universal  
Slip Joint for 1 1/2" Tubular  
Pipe; or 1 1/2" Male Thread;  
or Socket for glued  
connection to ABS pipe.



An Orbia business.

For further information visit:  
[www.wavin.us/hepvo](http://www.wavin.us/hepvo)